

HF MARINE TRANSCEIVER

**The latest ICOM
Digital Signal Processor
technology with
a compact remote head**



Standard 4 x 8 remote controller

The IC-M802 offers an industry-standard 4-inch tall (10.2 cm) remote controller. When set up with the Icom VHF radio, Icom offers you a complete communications station.

Large LCD with dot matrix characters

You can easily read the alphanumeric name of any of the 1355 ITU channels at a glance with the large LCD display. Nighttime operation is no problem with 10 levels (plus OFF) adjustable backlit display and keypad.

Easy to use in all conditions

The IC-M802 offers two large dials – bank and channel – for easy channel selection. Up to 16 banks of 20 (max.) each for user channels, and 17 banks for ITU channels are available.

Built-in digital selective calling

For added safety at sea, the IC-M802 offers the latest in one-touch DSC emergency communications technology. (Class E standard.) The emergency button is covered by a red, spring loaded hatch to avoid accidental DSC activation.

Digital signal processor advantage

The speech compressor, utilizing DSP, increases average talk power. Flexible filter settings provide for narrow band signals like e-mail, SITOR, FSK and other operation without an optional filter.

150 W (PEP) of powerful output

150 Watts of power offers superior worldwide communications. A one piece, die cast aluminum chassis and a large cooling fan allow continuous transmission at full output power – very important for data communications, like e-mail.

One-touch e-mail access

An SSB first! The IC-M802 can be set to memorize your HF e-mail access frequency, mode and bandwidth settings. At sea e-mail has never been easier.

* Please consult with an HF e-mail provider for details.

Automatic antenna tuner, AT-140

An optional automatic antenna tuner, AT-140, easily connects to the IC-M802. When the tuner cannot tune the antenna, the IC-M802 bypasses the tuner and displays a warning indicator on the LCD.

Other features

- Wide band receive coverage (0.5 – 29.9999 MHz)
- Remote control mic allows you to select channels directly
- Accessory RS-232C port allows connection of modem, etc.
- GPS input, NMEA 0183 version 3.01
- A headphone jack in front of the controller

SPECIFICATIONS

GENERAL

- Frequency coverage (Unit : MHz):
 Rx 0.5–29.9999 (continuous)
 Tx 1.6– 2.9999, 4.0– 4.9999, 6.0– 6.9999
 8.0– 8.9999, 12.0– 13.9999, 16.0– 17.9999
 18.0– 19.9999, 22.0–22.9999, 25.0– 27.5000
- Type of emission : J3E (SSB), J2B (AFSK), F1B (FSK), A1A (CW), H3E (AM*) (*Rx only)
- Number of channels : 1355 (max.)
 (160 programmable channels; 249 ITU SSB duplex; 72 ITU SSB simplex; 662 ITU FSK duplex; 160 e-mail; 21 ITU 4 MHz simplex; 31 ITU 8 MHz simplex)
- Antenna impedance : 50 Ω (SO-239)
- Power supply requirement : 13.6 V DC ±15%
- Max. current drain (at 13.6 V DC):
 Tx (Max. power) 30 A (typical)
 Rx (Max. audio) 3.0 A
- Operating temp. range : -30°C to +60°C; -22°F to +140°F
 Guaranteed range : -20°C to +55°C; -4°F to +131°F
- Frequency stability : ±10 Hz (at -20°C to +55°C)

- Dimensions (W×H×D; projections not included):
 Main unit 240×94×238.4 mm; 9.4×3.7×9.4 in
 Controller 220×110×84.4 mm; 8.7×4.3×3.3 in
 Speaker 110×110×84.4 mm; 4.3×4.3×3.3 in

- Weight :
 Main unit 4.7 kg; 10 lb 6 oz
 Controller 570 g; 1 lb 4 oz
 Speaker 370 g; 13 oz

TRANSMITTER

- Output power : 150, 60, 20 W PEP (Selectable)
- Spurious emissions : -62 dB
- Unwanted sideband : 55 dB
- Carrier suppression : 40 dB
- Microphone impedance: 8-pin connector (2.4 kΩ)

Supplied accessories:

- Separation cable, OPC-1106 (5 m; 16.4 ft)
- Hand microphone, HM-135
- Mounting bracket kits
- DC power cables
- External speaker, SP-24
- Microphone hanger
- ACC plugs
- Spare fuses

RECEIVER

- Sensitivity (at 20 dB SINAD):

	J3E, A1A	J2B, F1B	H3E	DSC (J2B)
0.5– 1.5999 MHz	30 dBμV emf	—	44 dBμV emf	0 dBμV emf (at 1% error rate)
1.6– 1.7999 MHz	13 dBμV emf	13 dBμV emf	30 dBμV emf	
1.8– 3.9999 MHz	8 dBμV emf	8 dBμV emf	24 dBμV emf	
4.0–29.9999 MHz	—	—	—	

- Spurious response rejection ratio:
 Tx/Rx (0.5–29.9999 MHz) More than 70 dB
 DSC (Except 1st IF image) More than 50 dB
 (1st IF image) More than 60 dB
- Audio output power : 4.0 W at 10% distortion
 (at 13.6 V DC) with a 4 Ω load
- Audio output impedance: 4–8 Ω
- Clarity variable range : ±150 Hz
- NMEA formats : GGA (NMEA 0183 Version 3.01)

All stated specifications are subject to change without notice or obligation.

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

AT-140

HF AUTOMATIC ANTENNA TUNER



IP56

Matches the transceiver to a long wire antenna with little insertion loss. Cable connections are easy to install. AT-130 is also available.

MN-100 ANTENNA MATCHER



Match the transceiver to a dipole antenna. Covers all HF bands from 1.5 to 30 MHz. Two 8 m (26.2 ft) antenna wires come attached.

MN-100L ANTENNA MATCHER



Match the transceiver to a longwire antenna. Covers all HF bands from 1.5 to 30 MHz. A 15 m (49.2 ft) antenna wire comes attached.

OPC-1147/N SHIELDED CONTROL CABLE



10 m (32.8 ft) shielded control cable connects between AT-140 and transceiver. OPC-1147N is for use with AT-140 Version 36.

HM-135 HAND MICROPHONE



Water resistant, remote function mic. Same as supplied.

MB-75 FLUSH MOUNT KIT




For mounting the controller or speaker to a panel.

SP-24 EXTERNAL SPEAKER



4×4-inch external speaker. Same as supplied. Input impedance: 4 Ω. Max. input power: 7 W.


AH-710 FOLDED DIPOLE ANTENNA



Covers 1.9 to 30 MHz band. Has an SO-239 connector and 30 m (98.4 ft) coaxial cable. Easy to assemble (non-kink construction).

- **RC-25 REMOTE CONTROLLER**
Remote controller head. Same as supplied.
- **OPC-1106 SEPARATION CABLE**
5 m (16.4 ft) separation cable between controller and main unit. Same as supplied.

SYSTEM OVERVIEW

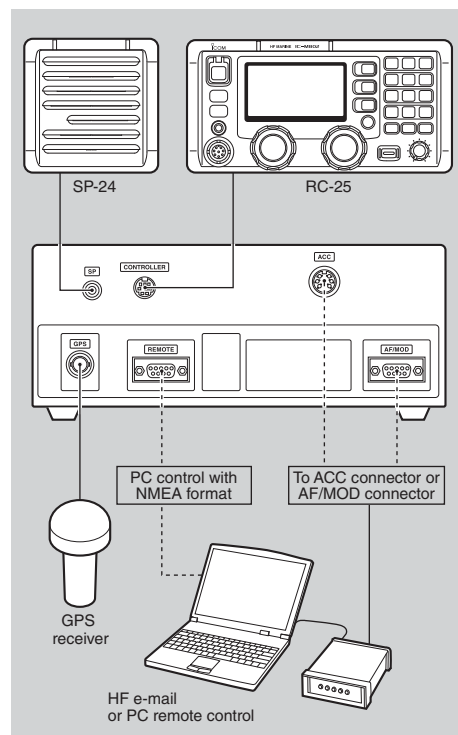

Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries.

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

12421 Willows Road NE,
 Kirkland, WA 98034, U.S.A.
 Phone: +1 (425) 454-8155
 Fax: +1 (425) 454-1509
 E-mail: sales@icomamerica.com
 URL: <http://www.icomamerica.com>

Icom (Europe) GmbH

Communication Equipment
 Auf der Krautweide 24
 65812 Bad Soden am Taunus, Germany
 Phone: +49 (6196) 76685-0
 Fax: +49 (6196) 76685-50
 E-mail: info@icom-europe.com
 URL: <http://www.icomeurope.com>

Icom France s.a.s.

Zac de la Plaine,
 1 Rue Brindejonc des Moulinais, BP 45804,
 31505 Toulouse Cedex 5, France
 Phone: +33 (5) 61 36 03 03
 Fax: +33 (5) 61 36 03 00
 E-mail: icom@icom-france.com
 URL: <http://www.icom-france.com>

Icom Canada

Glenwood Centre #150-6165
 Highway 17A, Delta, B.C.,
 V4K 5B8, Canada
 Phone: +1 (604) 952-4266
 Fax: +1 (604) 952-0090
 E-mail: info@icomcanada.com
 URL: <http://www.icomcanada.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
 Bajos A 08174, Sant Cugat del Valles,
 Barcelona, Spain
 Phone: +34 (93) 590 26 70
 Fax: +34 (93) 589 04 46
 E-mail: icom@icomspain.com
 URL: <http://www.icomspain.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
 Clayton, VIC 3168 Australia
 Phone: +61 (03) 9549 7500
 Fax: +61 (03) 9549 7505
 E-mail: sales@icom.net.au
 URL: <http://www.icom.net.au>

Icom Brazil

Rua Itororó, 444 Padre Eustáquio
 Belo Horizonte MG,
 CEP: 30720-450, Brazil
 Phone: +55 (31) 3582 8847
 Fax: +55 (31) 3582 8987
 E-mail: sales@icombrasil.com

Icom (UK) Ltd.

Blacksole House, Altira Park,
 Herne Bay, Kent, CT6 6GZ, U.K.
 Phone: +44 (0) 1227 741741
 Fax: +44 (0) 1227 741742
 E-mail: info@icomuk.co.uk
 URL: <http://www.icomuk.co.uk>

Your local distributor/dealer: